


## STANDARD SAFETY WALL PADDING

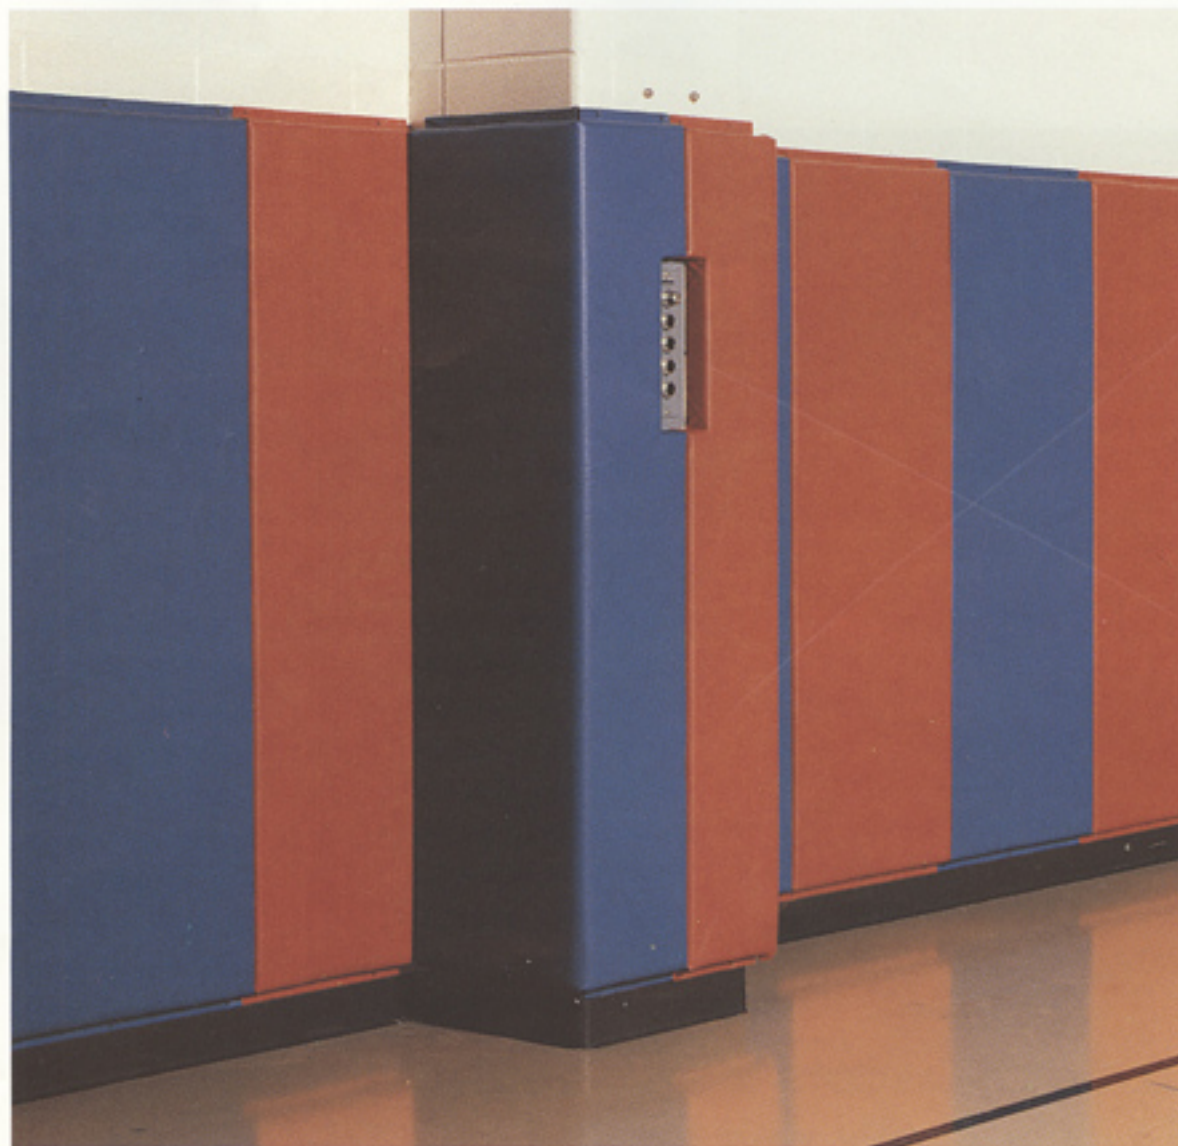

### STANDARD VINYL-COVERED WALL PADDING

Provides terrific player protection. Especially desirable behind basketball backstops and in wrestling and exercise rooms. Standard panels measure 2' x 6' with a 1" fabric covered nailing margin at the top and bottom for securing to the wall. Panels are also available without the 1" nailing strip (2' x 5'-10") for use with aluminum clip mount brackets. Cutouts for electrical outlets, switches or water fountains are easily made. On walls that are not flat, furring strips provided by the contractor are recommended.

Panels are constructed of the fillers listed below, cemented to 3/8" thick high-density oriented strand backing board and covered with a 14 ounce non-tear vinyl laminated material. Vinyl material has a rip-resistant quality utilizing industrial polyester filament yarns. It is mildew and rot resistant and fortified with an infection combating fungicide. Cover is listed as flame retardant by the California State Fire Marshall according to method 5903 which is a rating comparable to the standards of UL-214 and NFPA-701.

# TYPICAL WALL PAD DETAIL

